


# AMERICAN ACCESS SYSTEMS, INC.



## ADVANTAGE DKE INSTALLATION AND PROGRAMMING INSTRUCTIONS

MODEL  
26-100sg

Technical Support: 303-799-9757 Monday thru Friday 8:00 a.m. to 5:00 p.m.

**STEP 1-MOUNTING THE UNIT**

Page 3 tells you what tools and instruments you will need to install your unit and presents a parts check list. Make sure to have all the tools listed. Upon opening the box, check off the items enclosed with the unit. If any items are missing from your unit, contact American Access Systems immediately. The ADV-100g is designed to mount in a standard 2 x 4 electrical box. Two security screws are provided to prevent tampering. American Access Systems can provide the proper tool to install these screws for an additional cost. They are standard (snake eyes) screws.

Once you have made your connections, fold the wires into the box and secure the keypad being careful not to pinch any wires between the box and keypad panel.

**STEP 2-SYSTEM CONNECTIONS**


Study the WIRING COLOR CODE chart below and then proceed to the hookup steps.

(TABLE 1)	
WIRING COLOR CODES	12 - 24 VOLTS
WHITE	AC or DC
BROWN	LATCH CONTACTS
ORANGE	RELAY COMMON
BLUE	NORMALLY OPEN
	NORMALLY CLOSED

**HOOKUP STEPS**

- (A). Your DKLP control unit operates on 12 to 24 volts AC or DC. Measure the voltage from the power source to make sure it falls within these tolerances. Locate the two white wires on the circuit board and with the power off connect them to a constant power supply.
- (B). Connect the device to be controlled to the appropriate control leads of the ADV-100 (See above diagram).
- (C). Double Check your connections. When you are sure that everything is hooked up correctly, apply power to the unit. A BEEP should be heard when you press a key on the keypad.

**OPERATOR WIRING DIAGRAM**

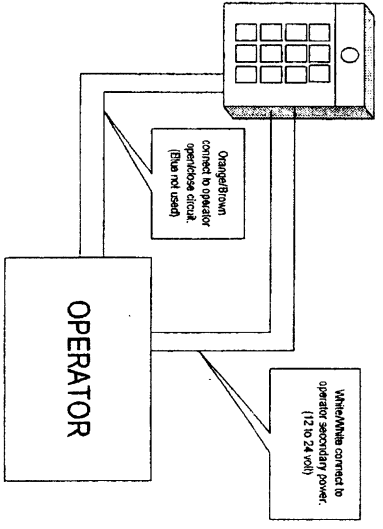

**THE MASTER CODE AND ACCESS CODES**

Your unit may be programmed with 100 multiple (4 digit) ACCESS CODES. The MASTER CODE is a 4 digit programmable code used for accessing the program mode. Note: The 151 master code will not activate the relay and open the access device.

**SETTING OR RESETTING THE MASTER CODE**

To set or reset the master code back to the factory default of 1 2 5 1 should you ever loose or forget your master code. To do this follow these steps: (SEE PAGE 7 FOR LOCATION DIAGRAM)

- (1). Disconnect power from the unit by disconnecting power from circuit board.
- (2). Reconnect power while holding down the PROGRAM/RESET button.
- (3). A single keybeep will be heard from the unit indicating that the master has been reset

**GOODBEEPS AND ERRORBEEPS**

A standard beep will be heard each time a key is pressed. A "GOODBEEP" is represented by a series of quick beeps in succession. An "ERRORBEEP" is represented by a single long beep.

**THE IDLE MODE**

The idle mode is the normal mode of operation. When in this mode the unit sits and waits for data from the keypad. If a key is pressed from the keypad, you will have approximately 3 seconds between each keypress before the unit resets.

**THE PROGRAM MODE**

The program mode is the mode of operation in which you will enter/change your access code. Upon entry, a GOODBEEP will be heard. A GOODBEEP will also be heard when you exit the program mode unless a keypress timeout occurs in which case you will receive an ERRORBEEP. The program mode is accessed by entering the "MASTER CODE" from the keypad. If the master code is valid, you will receive a GOODBEEP from the unit. In this mode you will have approximately 15 seconds between keypresses. If this time is exceeded, you will receive an ERRORBEEP and the unit will exit the program mode and return to the idle mode. To exit the program mode at any time, press #.

**THE \* AND # KEYS**

The \* and # keys serve specific functions while in the idle or program mode. The \* key is always the clear key. You should use this key if you make an entry error. The # key also serves as the clear key in the idle mode. In the program mode however, it serves as the exit key and will at any time when depressed, exit you from the program mode.

**PROGRAMMING**

A person desiring a access to the program mode will enter the present MASTER CODE. If the master code is valid a GOODBEEP will be heard prompting the person to enter a number corresponding to the SUB-MODE. eg. (MASTER CODE) + (Number corresponding to Sub-Mode). Once in the program mode the individual will have approximately 15 seconds between keypresses or the unit will sound an ERRORBEEP and exit the program mode. NOTE: An access code log sheet is provided on page 8 which can be photo-copied. A good source for access codes is the phone book or the last 4 digits of social security numbers. Note: The Master Code will not activate the relay!

**SUB-MODES**

**"1"**

**Sub-Mode 1 (Enter New Access Codes)**  
To enter new access codes enter the MASTER CODE, followed by 1, then enter each new ACCESS CODE you wish to program into the unit.  
(MASTER CODE) + 1 + (ACCESS CODE) + (ACCESS CODE) etc... (# to exit)

Should you make an entry error, simply press the \* key and re-enter the correct data. You may continue entering access codes until the memory is full or the # is pressed. You may select any 4 digit access code that is not already in use by the system. The unit will respond with a GOODBEEP with the acceptance of each new access code. If you do not receive a GOODBEEP after the entry of an access code, you must select a new access code as it is already in use by the system. When the memory becomes filled, you will receive a GOODBEEP indicating the acceptance of the last access code

entered and then the unit will sound an ERRORBEEP and automatically exit you from the program mode. **NOTE: You will not be able to enter this mode if memory is full and will receive an ERRORBEEP.**

## “2”

### Sub-Mode 2 (Delete Access Codes)

To delete any access code from memory enter the MASTER CODE, followed by 2, and then each access code to be deleted

(MASTER CODE) + 2 + (CODE TO BE DELETED) + (NEXT CODE TO BE DELETED) etc... (# to EXH)

Should you make an entry error, simply press the \* key and re-enter the correct data. You may continue deleting access codes in a successive manner. The unit will respond with a GOODBEEP with the successful deletion of each access code. If you do not receive a GOODBEEP the access code entered could not be found in memory and the unit will wait for you to enter another code to be deleted.

## “3”

### Sub-Mode 3 (Change Master Code)

To change the master code enter the PRESENT MASTER CODE, followed by 3, and then the NEW MASTER CODE.

(PRESENT MASTER CODE) + 3 + (NEW MASTER CODE)

Should you make an entry error, simply press the \* key and re-enter the correct data. You may select any 4 digit code as your new master code that is not already in use by the system. The unit will respond with a GOODBEEP upon acceptance of the new master code and automatically exit from the program mode. If the unit does not respond with a GOODBEEP, you must select a different code as it is already in use by the system.

## “4”

### Sub-Mode 4 (Set Relay Output Time from 1/2 to 9 seconds)

To set the relay output time in seconds enter the PRESENT MASTER CODE, followed by 4, and then the relay output time in seconds. NOTE: “0” = 1/2 seconds.

(PRESENT MASTER CODE) + 4 + (RELAY OUTPUT TIME)

Should you make an entry error, simply press the \* key and re-enter the correct data. You may enter any single digit value corresponding from 1/2 to 9 seconds of total length output time. Please note that when you enter “0”, the output time is set to 1/2 seconds.

## “5”

### Sub-Mode 5 (Set Latch Code)

**EXPLANATION:** The Latch Code toggles the state of the main relay (A) of the circuit board. The red LED will light if the relay is in the latched position. The latch code is useful in applications where the gate is desired to hold open. If the operator's close circuit is controlled by loops, timers, etc., they will be overridden by the latched state of the relay and the gate will hold open. An "OPEN-OVERRIDE" circuit must exist in the operator in order to utilize this function. If your gate cycles when this code is entered, your operator is not set up to utilize this function. Your local dealer or distributor should be able to assist you if you have any specific questions.

To program or change your latch code enter the following:

(MASTER CODE) + 5 + (LATCH CODE)

Should you make a code entry error, simply press the \* key and enter the correct code. You may select any 4 digit latch code you wish. If you receive an ERROR, you must select another code as it is already in use. The unit will respond with a GOOD BEEP with the acceptance of the new Latch Code and you will be exited from the program mode. **NOTE: On gates with a timer to close the "TIMED DURATION" starts when the latch code is released.**

## “0”

Sub-mode 0 (Clear memory) !!! WARNING ALL ACCESS CODES WILL BE DELETED !!!

To delete all access codes from memory enter the MASTER CODE, followed by 0, and the re-enter the MASTER CODE.

(MASTER CODE) + 0 + (MASTER CODE)

Should you make an entry error, simply press the \* key and re-enter the correct data. If the second entry of the master code is correct there will be a short pause before a GOODBEEP is heard and then the unit will automatically be exited from the program mode. If the second entry of the master code is incorrect, the unit will still respond with a GOODBEEP indicating that it is exiting the program mode however, there will be no pause on the GOODBEEP and the memory will not be erased.

**NOTE: It should not generally be necessary to erase all access codes from memory unless codes are forgotten and are occupying necessary memory space. A good log and maintenance of access codes should prevent this from ever needing to be done.**